

DISCLAIMER
WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY OF THE INFORMATION PROVIDED, NO LIABILITY CAN BE TAKEN FOR ANY ERRORS OR OMISSION. TAPESWITCH CORPORATION RESERVES THE RIGHT TO ALTER SPECIFICATIONS AND INTRODUCE IMPROVEMENTS WITHOUT PRIOR NOTICE.



REV.	DESCRIPTIONS	DATE	APPRO.
A	PER ECN 08-45	7-14-08	ADR
B	PER ECN 08-100	12-19-08	ADR
C	PER ECN 10-69	9-29-10	ADR
D	OPT. 2B ADDED, DNF18-250M	5/24/11	ADR
E	PER ECN 13-90	10/22/13	
F	ADDED OPTION 7	7/3/19	
G	PER ECN 23-05	3-20-23	C.D.

OPTION 1


FOR USE IN:
SYSTEM MAT INTERCONNECT
BUMPERS REQUIRING CONNECTORS
EDGES REQUIRING CONNECTORS

MOLEX OR EQUIVALENT
TERMINAL, MALE P/N 13355
(02-06-2103)


MOLEX OR EQUIVALENT
CONN, PLUG
P/N 13354
(03-06-2023)



USING 2 CONDUCTOR WIRE

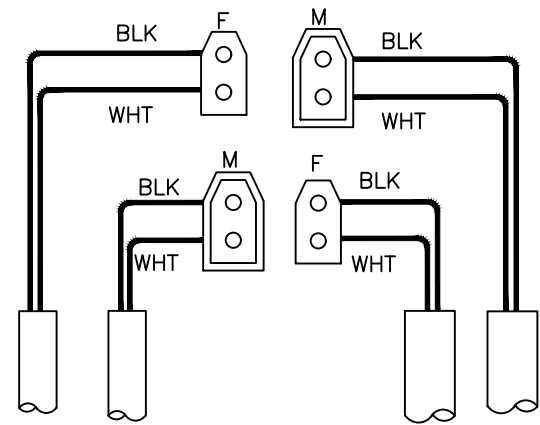


USING 4 CONDUCTOR WIRE

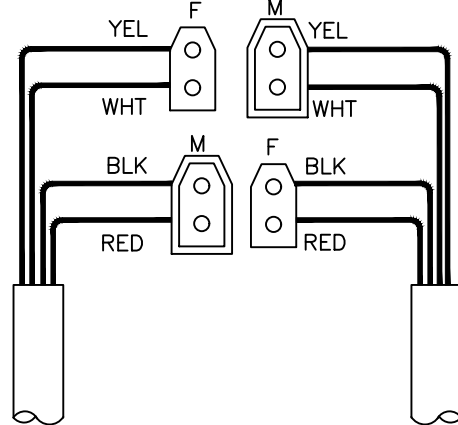

MOLEX OR EQUIVALENT
CONN, RECEPT
P/N 13353
(03-06-1023)





MOLEX OR EQUIVALENT
TERMINAL, FML P/N 13356
(02-06-1103)



OPTION 7

FOR USE IN: MAT WITH 20/4 OR
DOUBLE ZIPCORD WIRES


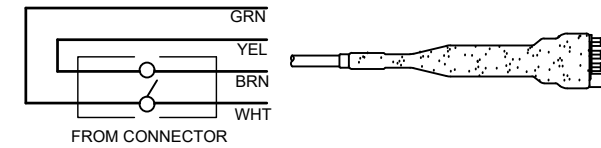


OPTION 2


FOR USE IN:
SINGLE WIRE CONNECTIONS

A) PANDUIT OR EQUIVALENT
(DNF-18-250 FIM)

B) PANDUIT OR EQUIVALENT
(DNF-18-250M)





PANDUIT OR EQUIVALENT
(DNF-18-250 FIB-M)



OPTION 4

FOR USE IN: DISCRETE WIRE
CONNECTIONS WITH LIMITED ACCESS

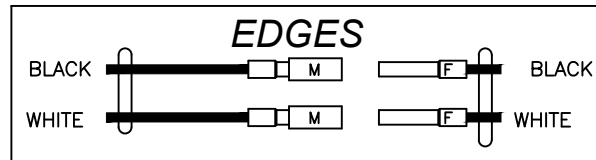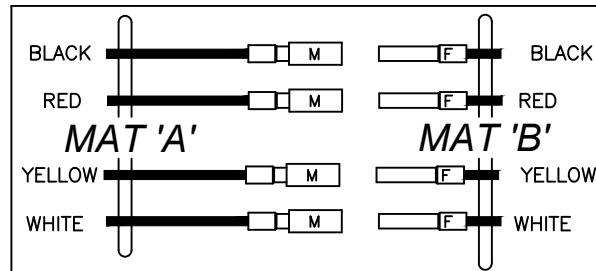


MALE PLUG TS P/N 13368
FEMALE SOCKET TS P/N 13369

OPTION 6


FOR USE IN: MAT OR EDGE LEADS
WITH 20/4 OR DOUBLE ZIPCORD WIRES
INTERNAL SOLDER CUP CONNECTIONS.

M12-4 MALE - TAPESWITH No 13322

20/4 ϕ 3/16 WIRING

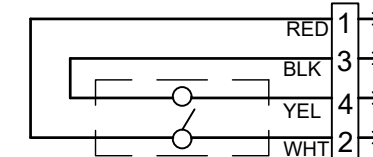

22/2 DOUBLE ZIPCORD WIRING

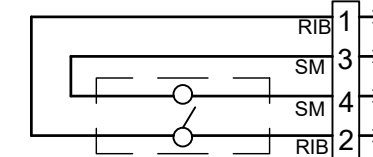

TE CONN. OR EQUIVALENT
(1838275-2)




- NOTES FOR OPTIONS 1 THRU 4:
1. SOLDERLESS, CRIMPED ON CONNECTIONS.
 2. FOR 18 AWG - 22 AWG INSULATED WIRE.
 3. FOR MAT INTERCONNECTS USE 20/4 CABLE P/N 10482.

OPTION 3

FOR USE IN:
CONVEYOR BUMPERS

KOBECONN OR EQUIVALENT
(159-1501)
P/N 14346


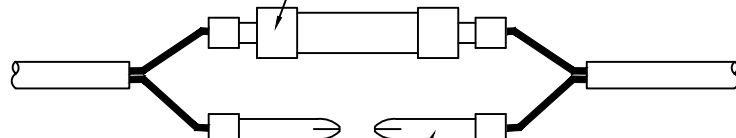


P/N 14345

KOBECONN OR EQUIVALENT
(159-3156)

OPTION 5

SOLDER SLEEVE TS P/N 13312
MOUSER #650-CWT900L OR EQUIVALENT

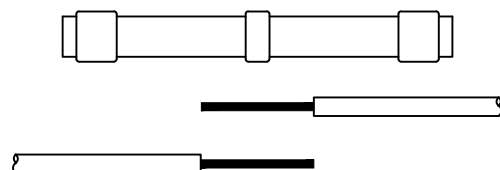

- NOTES FOR OPTION 5:
1. PREFLUXED SOLDER SLEEVE.
 2. FOR 18 AWG - 22 AWG INSULATED WIRE.

PART #:

MAT'L:

CONNECTOR OPTIONS
SHEET 1 OF 2

TAPESWITCH CORPORATION



FARMINGDALE, NEW YORK, U.S.A.

SCALE	N/A	DRAWN	S. KLUG
APPD	ADR	DATE	5-7-08
SIZE	DRAWING NUMBER		
B	P08-4-4		




OPTION 8:

FOR USE IN:
 UMA MAT CONNECTIVITY APPLICATIONS
 SUBSTITUTE FOR UMA-CBL-4PCF-M8 SERIES
 CONNECTORS.


REV.	DESCRIPTIONS	DATE	APPRO.
G	SEE SHEET 1 FOR REV. HISTORY	---	---

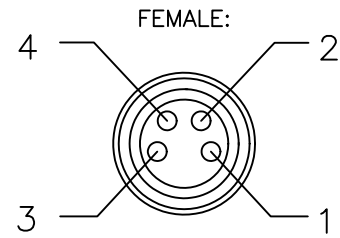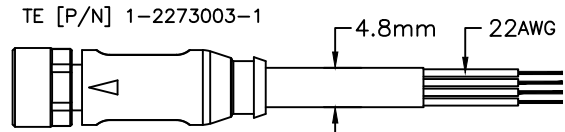


22AWG/4, PVC JACKETED (M8), FEMALE:

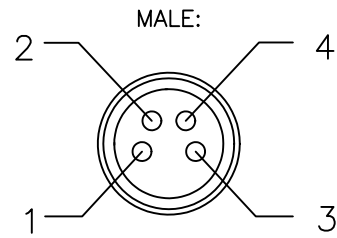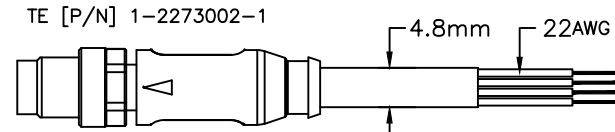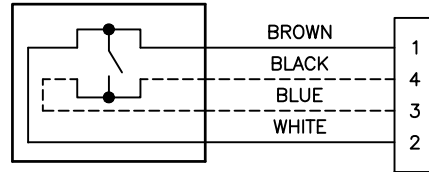

22AWG/4, PVC JACKETED (M8), MALE:

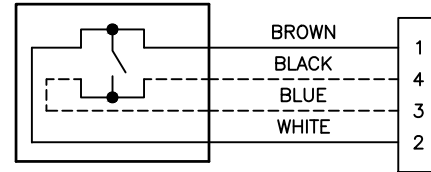

TYPICAL CKP/AMCKP 4-WIRE STANDARD CABLE ANALOGUE:

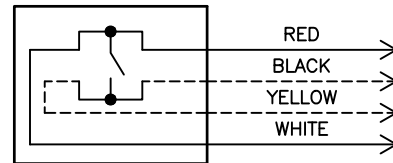

PART #:

MAT'L:

CONNECTOR OPTIONS		SCALE <i>N/A</i>	DRAWN <i>S. KLUG</i>
SHEET 2 OF 2		APPD <i>ADR</i>	DATE <i>5-7-08</i>
TAPESWITCH CORPORATION		SIZE	DRAWING NUMBER
FARMINGDALE, NEW YORK, U.S.A.		<i>B</i>	<i>P08-4-4</i>